



2U Version with Fitted Modules

- ❖ Withdrawable Shelf into a 19" Rack
- ❖ Easy Installation
- ❖ 2 Horizontal Positions for IPLOG and IO Modules
- ❖ Including 25W Power Supply 230VAC/48VDC

PRODUCT NAME	CODE	SUPPLY
SHELF-IPLOG-1U/SU	4-500-012	230VAC
SHELF-IPLOG-2U/SU	4-500-013	230VAC

Withdrawable 19" shelves SHELF-IPLOG -... are designed for mounting IPLOG PLC and IO modules of the BOX series in 19" rack. The delivery includes a shelf with two free positions for the installation of IPLOG PLC and IO modules of the BOX series. Power supply 25W for powering the installed devices and 2 side panels for mounting into a 19" rack. The table below shows the possible combinations.

If you plan to install IPLOG with a 2G, 3G or 4G-LTE interface in the shelf, always first check that there is sufficient signal strength at the installation site.

### Compatible Devices

	POSITION 1	POSITION 2	SUPPLY
SHELF-IPLOG-1U/SU	IPLOG-G1, G2, G3 without IO Module	IPLOG-G1, G2, G3 without IO Module	230VAC/48VDC-25W
	Any IO Module	Any IO Module	230VAC/48VDC-25W
SHELF-IPLOG-2U/SU	IPLOG-G1, G2, G3	IPLOG-G1, G2, G3	230VAC/48VDC-25W
	Any IO Module	Any IO Module	230VAC/48VDC-25W


### Technical Parameters

	Parameter	Value	Unit	Note
Mechanical	Dimension - w / h / l	19" x 2U(1U) x 152	mm	
	Number of Postions	2		
	Material	Al plate		
	IP Code	IP20		
	Weight	1	kg	without Devices
Power Supply	Input Supply	88 up to 264	VAC	
	Output Voltage	48	VDC	
	Power	25	W	
	Efficiency	85	%	
	Operating Range	-20....+70	°C	100% Power at max. +50°C +70°C - max. 60% Power
The producer retains the right to change any technical parameters without previous written or published notification.				

# SHELF-IPLOG

## Pull-out 19" Shelf

### Dimensions SHELF-IPLOG-2U/SU

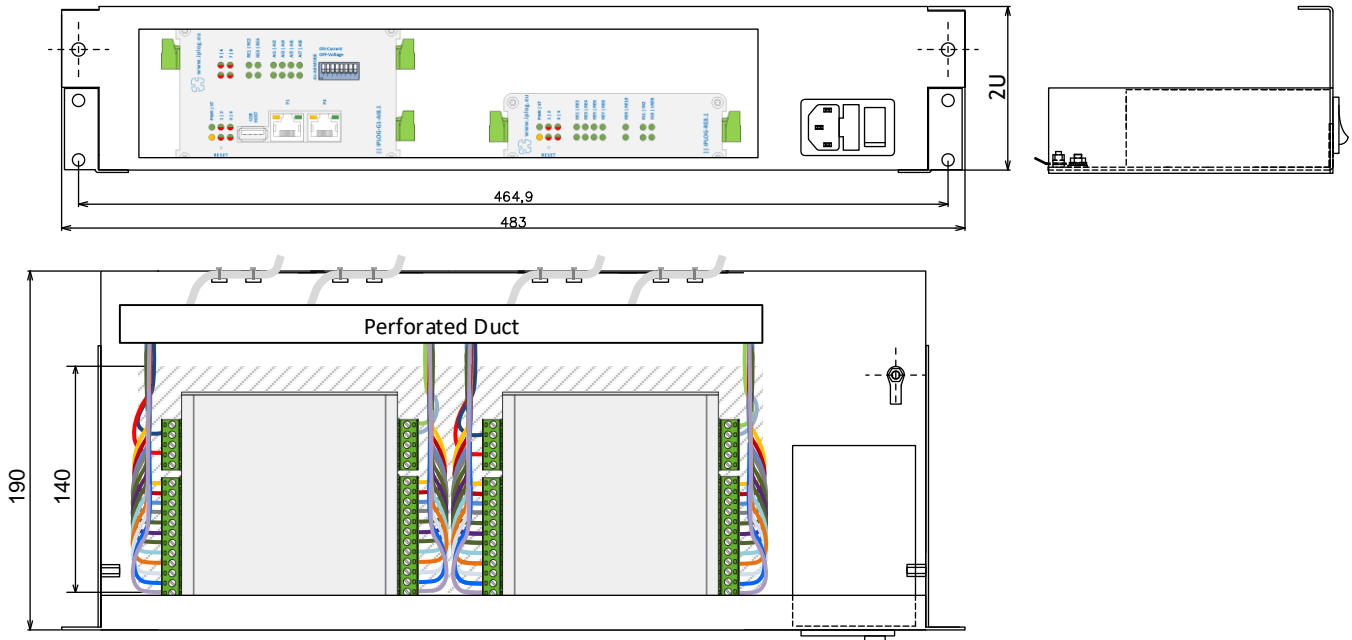

### Dimensions SHELF-IPLOG-1U/SU

