



- ❖ Compatible with IPLOG-GAMA
- ❖ Client and AP Mode
- ❖ Supported Standards IEEE 802.11b/g/n
- ❖ Security WEP 64/128, WPA, WPA2, IEEE802.1X
- ❖ Frequency Range: 2.4000-2.4835 GHz
- ❖ Output Power:
  - 11n (20 MHz) MCS7: -68 dBm ± 2 dBm
  - 11n (40 MHz) MCS7: -64 dBm ± 2 dBm
  - 11g 54 Mbps: -71 dBm ± 2 dBm
  - 11b 11 Mbps: -81 dBm ± 2 dBm

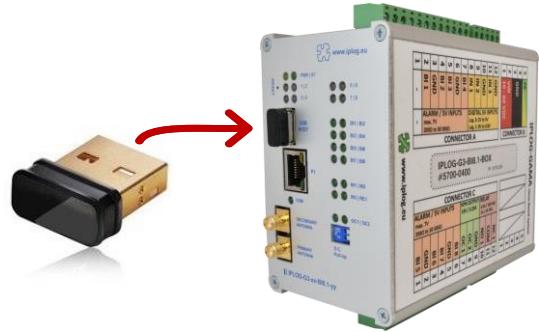

PRODUCT NAME	CODE	NOTE
WiFi-Dongle	4-500-044	USB A


## AP Mode

In Acces Point mode IPLOG provides WiFi connection to clients.

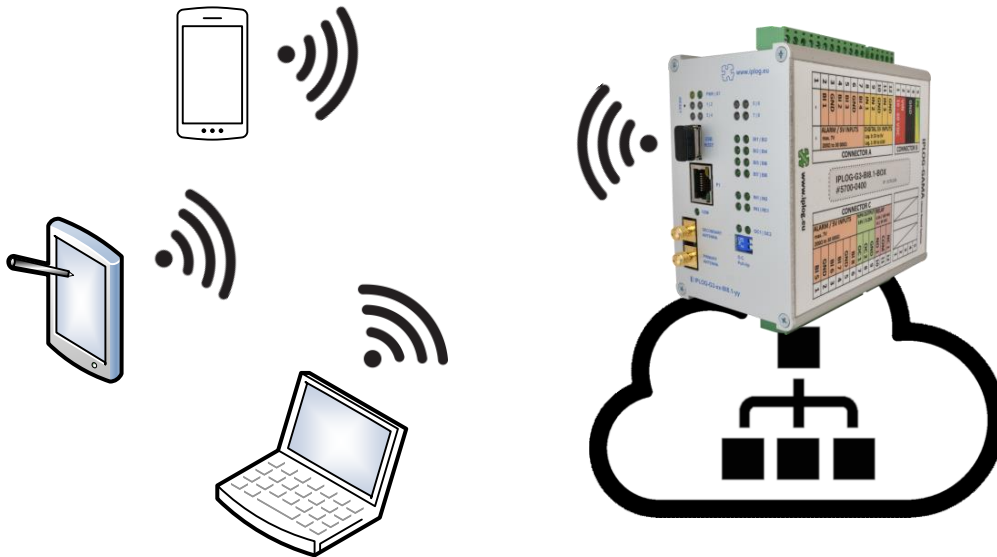

## Client Mode

In Station mode IPLOG is connected to an existing WiFi network.

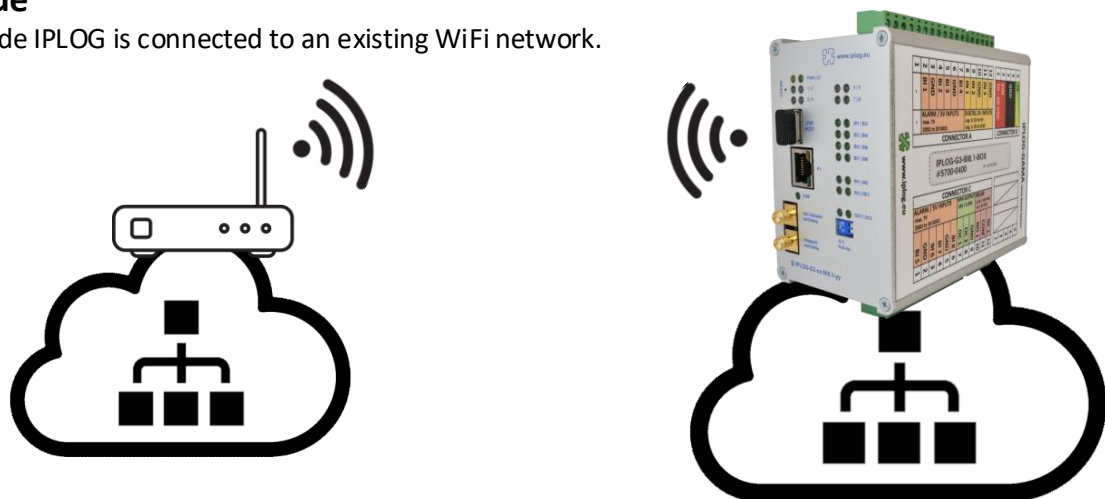

[wiki.iplog.eu](http://wiki.iplog.eu)

Practical examples of settings can be found at [wiki.iplog.eu](http://wiki.iplog.eu).